


RACCORD 3 PIÈCES CONIQUE EN LAITON

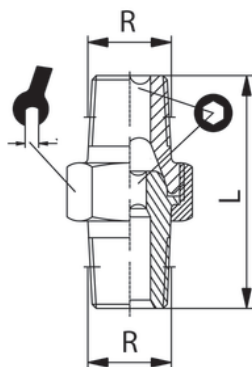

Référence	R	L	⌀	○
306002	R1/8	27,5	15	5
306004	R1/4	33,5	19	6
306006	R3/8	37	22	8
306008	R1/2	45	27	12
306010	R3/4	54,5	36	14
306012	R1	65	46	19
306014	R1/8-R1/4	30,5	15	5
306015	R1/4-R3/8	34,5	19	6

DONNÉES TECHNIQUES

Température d'utilisation	max. 150°C	
Pression d'utilisation	jusqu'à 60 bar	
Matériaux	Laiton et laiton nickelé	CW614N et CW617N
Milieu	Pneumatique, hydraulique, eau, vapeur, etc.	
Filetage	DIN 3852 / DIN 3858	

TECHNICAL DATA

Operating temperature	max. 150°C	
Operating pressure	Up to 60 bar	
Materials	Brass & nickel-plated brass	CW614N and CW617N
Medium	Air, water, oil, steam, etc.	
Thread	DIN 3852 / DIN 3858	

TECHNISCHE DATEN

Betriebstemperatur	max. 150°C	
Betriebsdruck	Bis 60 bar	
Werkstoffe	Messing und Überwurfmutter Messing vernickelt	CW614N and CW617N
Medium	Luft, Wasser, Öl, Dampf, etc.	
Gewinde	DIN 3852 / DIN 3858	