

Lubricator G 3/8, G 1/2


item	type	DO.22	DO.23
port size		G 3/8	G 1/2
description		proportional lubricator	
mounting		vertically	
supply pressure		Pe max. 16 bar, Pe max. 25 bar with metal bowl	
media and ambient temperature		max. 60°C (oth. temperature ranges available upon request)	
bowl volume		110 cm ³	
oil dosage rate when qv=1000 l/min		1-2 drips/min (determining factor)	
kind of oil		CL 32 standardized to DIN 51517 - ISO VG 32	
fixing		bracket	
weight		0,55 kg	



technical modifications keep in reserve!

replacement parts

no	description	material	order-no.
1	body	zinc - Z 410	---
2	oil filler screw L.33-8	POM - NBR	7.2533.08.000
3	oil bowl	polycarbonate	8.2322.24.000
4	dome assembly	PA	9.9911.00.017/V
5	O-ring 58 x 3 DF.22-7	NBR	1.1122.07.000



series 2

ordering information

DO. ****** *****
 type
 1 port size 2 option

ordering example: DO.22 M


port size	
1	22 G 3/8
	23 G 1/2
options	
2	B bowl guard
	M metal bowl
	N electrical level control

page: DO.22 (09/04)


application information

- oil fill in is possible under pressure


dimensions (mm)

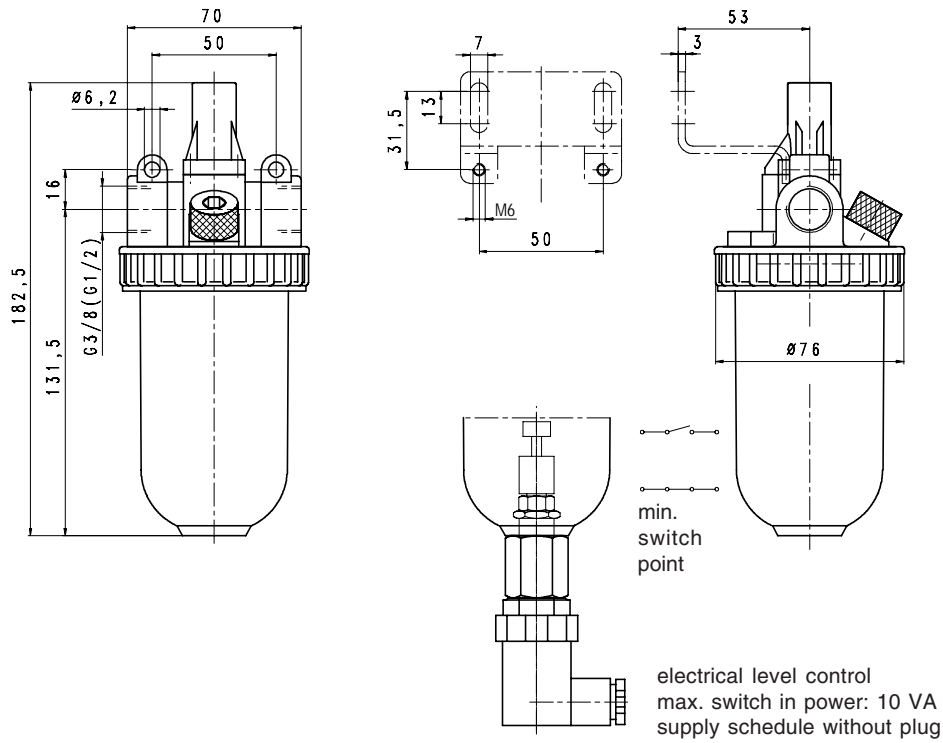

flow characteristics

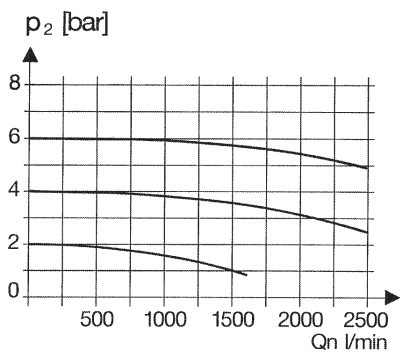


lubricator operating limit

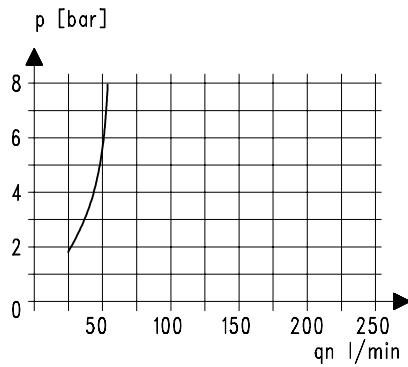


accessories

bowl guard



type: DF.22-11

mounting bracket



type: ZW.30

metal bowl



type: DO.22 M